

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number  
**WO 01/19220 A1**

- (51) International Patent Classification<sup>7</sup>: A47C 7/74, B60N 2/44, H05B 3/34
- (21) International Application Number: PCT/SE00/01798
- (22) International Filing Date:  
15 September 2000 (15.09.2000)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:  
9903324-3 16 September 1999 (16.09.1999) SE
- (71) Applicant (for all designated States except US): KONGSBERG AUTOMOTIVE AB [SE/SE]; Box 504, S-565 28 Mullsjö (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ÖBERG, Peter [SE/SE]; Skolvägen 21, S-560 42 Sandhem (SE).
- (54) Agents: ANDERSSON, Per et al.; Albihns Patentbyrå Göteborg AB, P.O. Box 142, S-401 22 Göteborg (SE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR MANUFACTURING AND APPLICATION OF HEATING ELEMENT FOR HEATING IN A VEHICLE

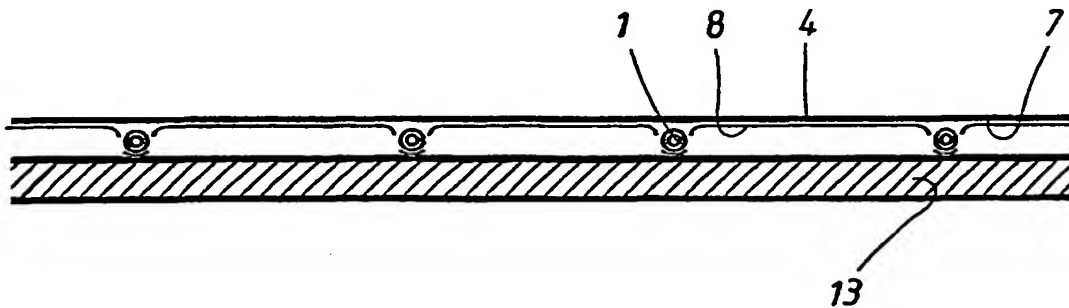

(57) Abstract: A method for production and application of heating elements for heating in vehicles is described. The heating element consists of a heating wire (1) defining at least one electric heating loop extending, in its operating position, in a predetermined pattern. The heating wire (1) is positioned onto one side (7) of a temporary carrier (8). An adhesive (4) is applied over said carrier, and over the heating wire, causing the heating wire to adhere to the surface of the carrier. The carrier with the heating wire is then transported to a final substrate (13), which the heating element is to be in close contact with. The heating wire is pressed against the substrate, and the adhesive is activated so as to make the wire adhere to the substrate. The carrier is removed, so that the heating wire is released from the carrier and adheres to the substrate, to form the heating element for heating in the vehicle.